

**XAC1232**

ChemTrim  
 115v / 230v AC or 24V DC  
 EXTERNAL SETPOINT 0/4-20mA  
 RS 232 PDA / LAPTOP  
 RS485 OPC-SCADA / CHEMWEBSERVER


4 ALARM RELAYS  
 AUTO / SHUTDOWN

TRIPLE VALIDATION OPTION

NOTE  
 CHOOSE EITHER VENT RELIEF OR VACUUM LOCK. ( ONE OPTION ONLY ).

<b>WALLACE &amp; TIERNAN PRODUCTS</b>		MATERIAL:	
CHEMFEED LTD, PRIORY WORKS, TONBRIDGE, KENT, TN11 0QL TEL: +44 (0) 1732 771777 FAX: +44 (0) 1732 771800		SCALE: NA	ENG:
		RELEASED:	PROD/SALES:
FLOW DIAGRAM ChemTrim		<b>XAC1232</b>	
1	04 APR 03	ORIGINAL	MJH
THIRD ANGLE PROJECTION		DIMENSIONS IN mm	
ISSUE	DATE	REVISION DESCRIPTION	BY
1	04 APR 03	ORIGINAL	MJH
REF: ..\products\control\v600\xac1232.dwg		ISS: 1	DESIGN CENTRE: U.K. SHEET 1 OF 1
		TOLERANCES TO F80481	A3/B

# XAC1238

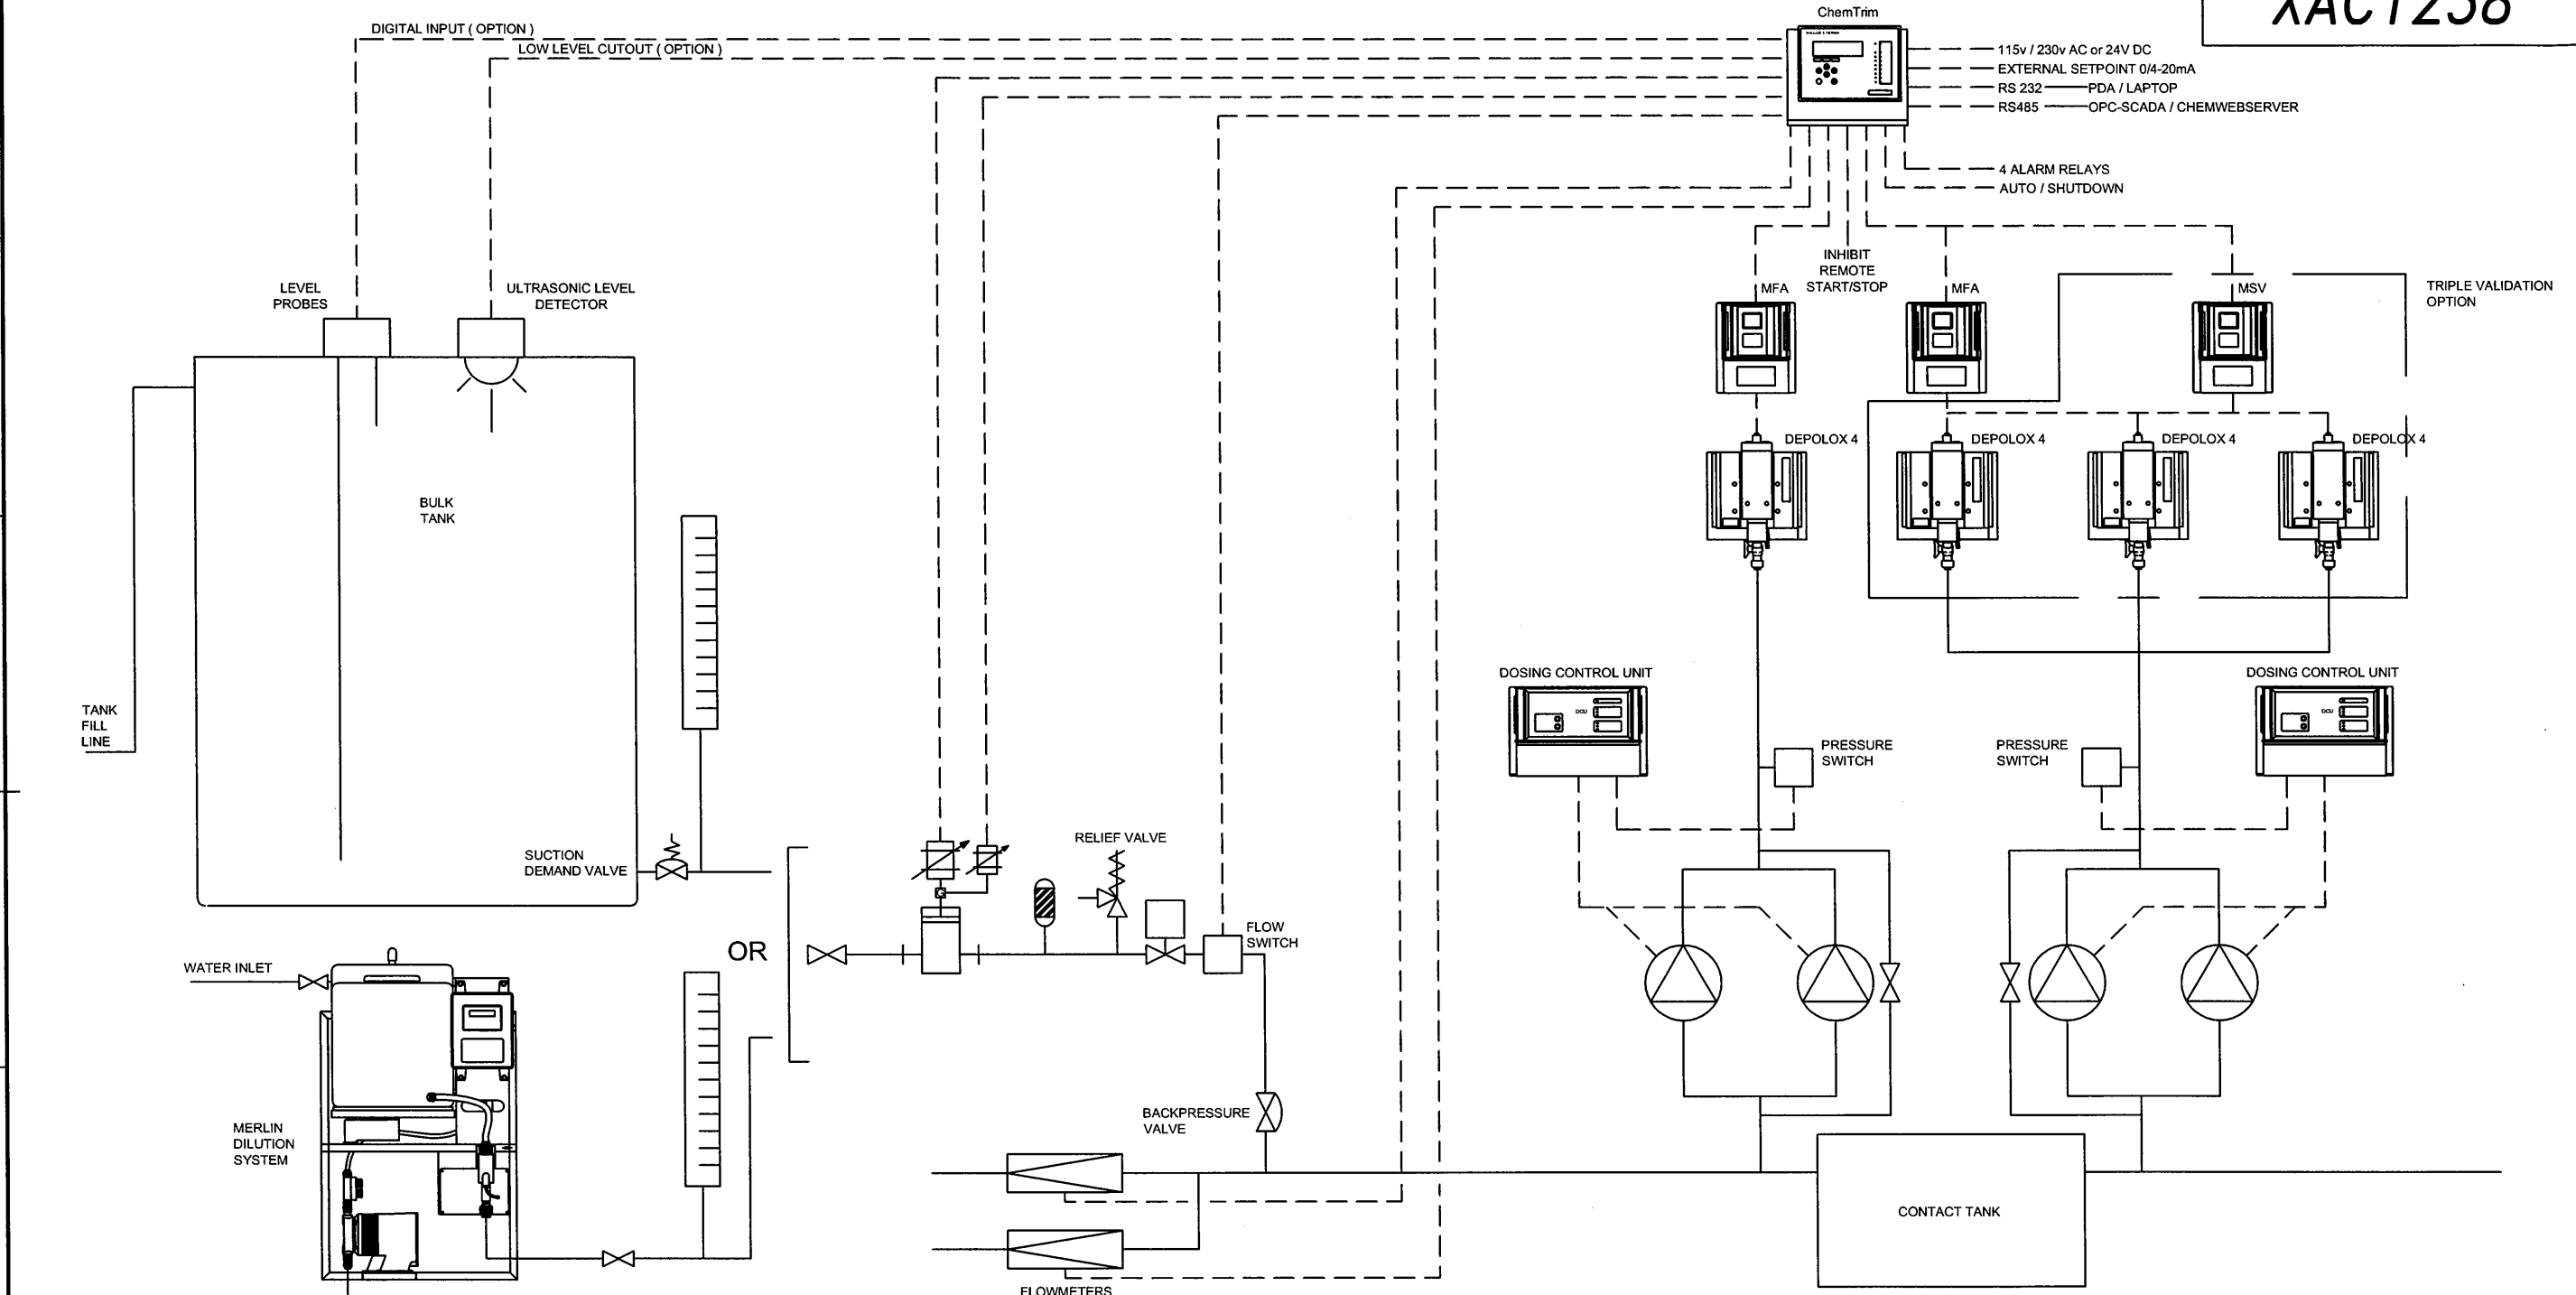

DIGITAL INPUT (OPTION)  
 LOW LEVEL CUTOUT (OPTION)

ChemTrim  
 115v / 230v AC or 24V DC  
 EXTERNAL SETPOINT 0/4-20mA  
 RS 232 PDA / LAPTOP  
 RS485 OPC-SCADA / CHEMWEBSERVER

4 ALARM RELAYS  
 AUTO / SHUTDOWN

INHIBIT REMOTE START/STOP

MFA MFA MSV

DEPOLOX 4 DEPOLOX 4 DEPOLOX 4 DEPOLOX 4

DOSING CONTROL UNIT PRESSURE SWITCH PRESSURE SWITCH

TRIPLE VALIDATION OPTION

WATER INLET

MERLIN DILUTION SYSTEM

CHEMICAL STORAGE TANK

OR

RELIEF VALVE

FLOW SWITCH

BACKPRESSURE VALVE

FLOWMETERS

**NOTE**  
 THE DOSING PUMP CONTROL OPTIONS ARE POSTIONER ONLY, PULSE ONLY, mA (VSD) ONLY, POSTIONER & mA ONLY. ONLY ONE OPTION IS SELECTABLE

<b>WALLACE &amp; TIERNAN PRODUCTS</b>		MATERIAL:	
CHEMFEED LTD, PRIORY WORKS, TONBRIDGE, KENT, TN11 0QL TEL: +44 (0) 1732 771777 FAX: +44 (0) 1732 771800		SCALE: NA	ENG:
		RELEASED:	PROD/SALES:
FLOW DIGRAM ChemTrim		<b>XAC1238</b>	
THIRD ANGLE PROJECTION	DIMENSIONS IN mm	DESIGN CENTRE: U.K.	SHEET 1 OF 1
REF: ..\products\control\v600\xac1238.dwg	ISS: 1	TOLERANCES TO F80481	A3/B © 2000 CHEMFEED LTD

1	15 APR 03	ORIGINAL	MJH
ISSUE	DATE	REVISION DESCRIPTION	BY